

Ceramic Shear Accelerometer

Type 8202A... ,8203A...

High sensitivity, charge mode accelerometer

Designed for long-term, high temperature stability, Type 8202A... and Type 8203A... accelerometers measure vibration in a wide range of applications.

- High impedance, charge mode
- High temperature range up to 250 °C
- Ceramic Shear sensing element
- Low transverse sensitivity
- Long-term stability at extended temperatures
- Conforming to CENELEC

Description

Types 8202A... and 8203A... are high impedance, charge mode accelerometers designed for vibration measurements where temperature extremes may be experienced. A Ceramic Shear sensing element produces a significant charge output that can be easily converted into a useable analog voltage signal via a charge amplifier. Kistler's shear technology assures high immunity to base strain, thermal transients and transverse accelerations. A unique connector design features a ceramic insulator for long-term stability even at extended operating temperatures. Additional features include high frequency response, lightweight and hermetic sealing. It is recommended that low noise transducer cables be used between the accelerometer and the input of the charge amplifier or charge converter.


Internal of these hermetically sealed accelerometers is a shear mode, ceramic sensing element, providing a significant charge output. Type 5050A... In-Line Charge Amplifier is recommended for use with Types 8202A... and 8203A... . Type 5050A... is a lower cost alternative to the laboratory amplifier allowing the measurement system to take on the appearance of the traditional voltage mode accelerometer and power supply/coupler.

Application


Types 8202A... and 8203A... are ideal for automotive, aerospace and environmental testing where low impedance sensors are limited by temperature range. They can also be used in vehicle testing, ESS, and modal analysis applications.

Compliant Information

Types 8202A... and 8203A... are ideal for automotive, aerospace and environmental testing where low impedance sensors are limited by temperature range. They can also be used in vehicle testing, ESS, and modal analysis applications.

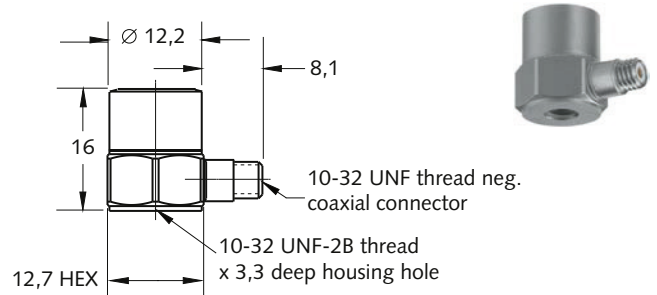

8202A...

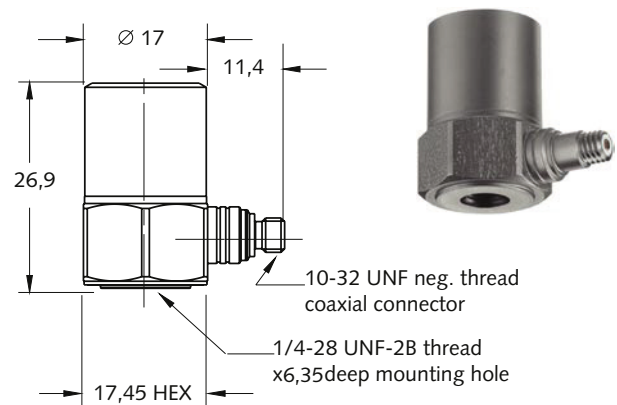

Dimensions are shown in mm, unless otherwise noted.

8203A...

Mounting


Reliable and accurate measurements require that the mounting surface be clean and flat. The accelerometers can be attached to the structure utilizing the supplied 1/4-28 stud. The Operating Instruction Manual for Types 8202A... and 8203A... provides detailed information regarding mounting surface preparation.

Technical data


Type	Unit	8202A10	8203A50
Acceleration range	g	±2 000	±1 000
Threshold nom. (noise 100µVrms)	g_{rms}	0,001	0,001
Sensitivity	pC/g	-10	-50
Resonant frequency mounted, nom.	kHz	45	24
Frequency response ±5%	Hz	5 ... 10 000	5 ... 4 000
Amplitude non-linearity	%FSO	±1	±1
Insulation resistance (24°C)	Ω	≥1 x 10 ⁸	≥1 x 10 ⁸
Capacitance	pF	500	1 400
Transverse sensitivity nom., (max. 5%)	%	1,5	1,5
Long term stability	%	±1	±1
Environmental:			
Base strain sensitivity @ 250µε	g/µε	0,005	0,005
Shock limit (1ms pulse)	g_{pk}	5 000	5 000
Temperature coefficient of sensitivity	%/°C	0,13	0,13
Temperature range operating	°C	-70 ... 250	-70 ... 250
Construction:			
Sensing element	type	Ceramic Shear	Ceramic Shear
Housing/base	material	St. Stl.	St. Stl.
Sealing-housing/connector	type	Hermetic / ceramic	Hermetic / ceramic
Connector	type	10-32 neg	10-32 neg
Weight	grams	14,5	44,5
Mounting	type	10-32 UNF-2B thread	1/4-28 thread

1 g = 9,80665 m/s², 1 Inch = 25,4 mm, 1 gram = 0,03527 oz, 1 lbf-in = 0,1129 Nm

Charge output sensor and IEPE converter

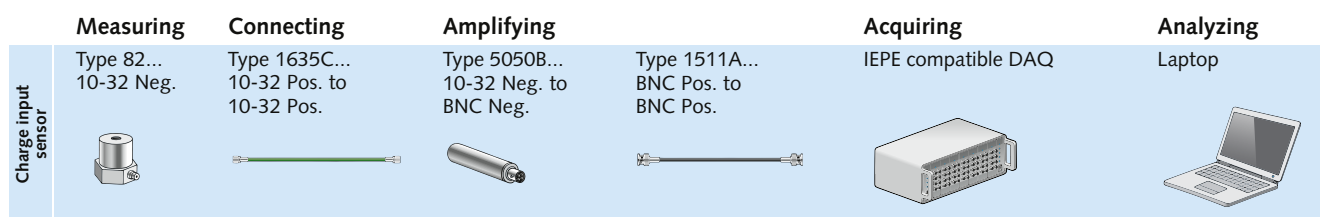

Charge output and Kistler LabAmp

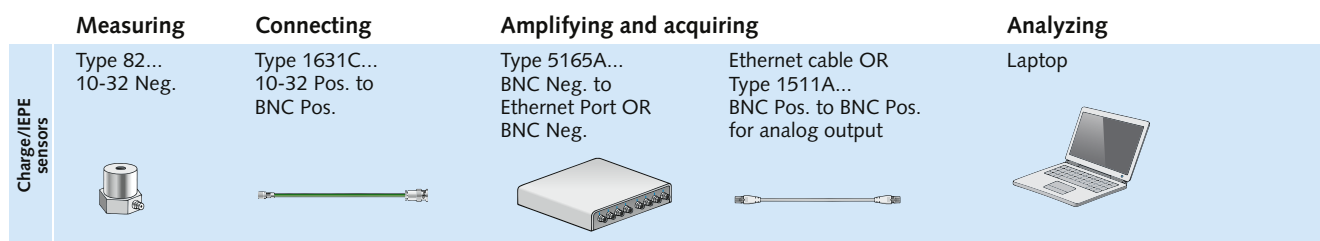

Accessories included – Type 8202A...

- | | Type |
|--|-------------|
| • 10-32 thd. mounting stud | 8402 |
| • Mounting stud 10-32 to M6, shipped only outside N. America | 8411 |

Optional accessories – Type 8202A...

- | | Type |
|--------------------------|-------------|
| • Mounting magnet | 8452A |
| • Triaxial mounting cube | 8502 |

Accessories included – Type 8203A...

- | | Type |
|---|-------------|
| • 1/4-28 to 10-32 thd. mounting stud | 8410 |
| • 1/4-28 to 1/4-28 thd. mounting stud | 8412 |
| • Mounting stud 1/4-28 to M8, shipped only outside N. America | 8421 |

Optional accessories – Type 8203A...

- | | Type |
|--------------------------|-------------|
| • Triaxial mounting cube | 8506 |
| • Magnetic mounting base | 8456 |

Ordering key

Measuring Range		820	
±2 000 g accelerometer, with 10-32 thd.	2A10	↑	
±1 000 g accelerometer, with 1/4-28 thd.	3A50		

8202A_000-212e-08.18