

# Uniaxial accelerometer

## High temperature accelerometer

Type 8211A



IECEx



RoHS

Accelerometer Type 8211A... is designed for permanent vibration monitoring as well as for R&D application where size and weight have to be minimal.

- Permanent temperature range  $-55 \dots 700 \text{ }^\circ\text{C}$
- Short time operating temperature  $-55 \dots 1\,000 \text{ }^\circ\text{C}$
- Internally case isolated; differential charge output
- Frequency response up to 5 kHz ( $\pm 10 \%$ )
- Highest reliability
- Not pyroelectric
- Dimensions: 16.6 x 16.6 x 29.5 mm, Weight: 30 gramm
- ATEX / IECEx certified



### Description

Core of the sensor is the single crystal PiezoStar measuring element, which has a temperature capability of up to  $1\,000 \text{ }^\circ\text{C}$  and without any pyroelectric effect. The sensor features a shear design, which significantly reduces the influence of temperature and base strain. Other features are high frequency response, a hermetic construction of the housing and a small design.

The sensitive axis of the sensor lies in the Z - direction.

To reach highest resolution in harsh environment, the sensor provides a differential signal output and features an internally case isolated design. The integrated hardline cable is robust, low noise and has a temperature rating of over up to  $1\,000 \text{ }^\circ\text{C}$ . The cable is available in a standard length of 3 m as well as in customer specific lengths.

The accelerometer is available in an ATEX / IECEx certified version for applications in hazardous areas.

### Application

Main applications are condition monitoring of gas turbines, structural analysis of turbomachinery and general purpose high temperature applications in industrial and R&D environment, which require:

- Temperature capability up to  $1\,000 \text{ }^\circ\text{C}$
- Ex-certification for use in potentially explosive environment
- Integrated hardline cable
- EMI immune measuring chain

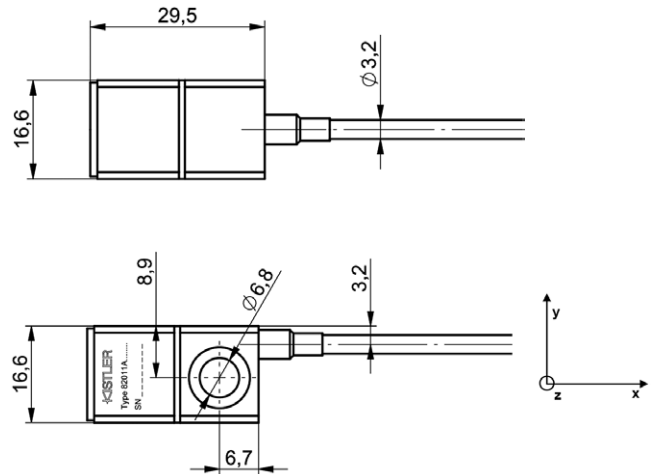


Fig. 1: Accelerometer dimensions

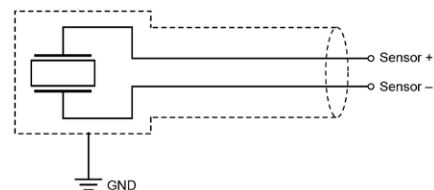


Fig. 2: Electrical schematic, 2-wire, internally case isolated

8211A\_003-340e-09.23

**Technical data<sup>1)</sup>**

**Dynamic characteristics**

Sensitivity @ 159.15 Hz	pC/g	5 ±3%
	pC/ms <sup>-2</sup>	0.51 ±3%
Measuring range	g <sub>pk</sub>	±500
	ms <sup>-2</sup>	±4905
Frequency response		
upper freq. (+5 %)	Hz	1 ... 4000
upper freq. (+10 %)	Hz	1 ... 5000
lower freq. (-3 dB) <sup>2)</sup>	Hz	0.5
Resonance frequency, typical		
@ 25 °C	kHz	>12
@ 480 °C	kHz	>10
Thermal sensitivity shift, typical	% / 100 °C	1.4
Transverse sensitivity	%	<2
Non linearity	%	<1

<sup>1)</sup> Reference temperature for performance specifications is 25 °C unless otherwise noted.

<sup>2)</sup> In combination with Kistler differential charge amplifier Type 5181, 5183, 5185.

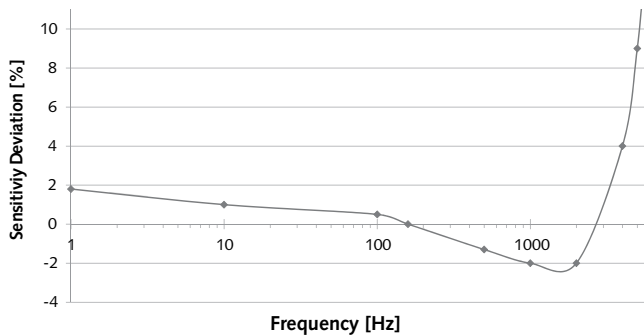


Fig. 3: Typical frequency response; relative to reference value at 159 Hz

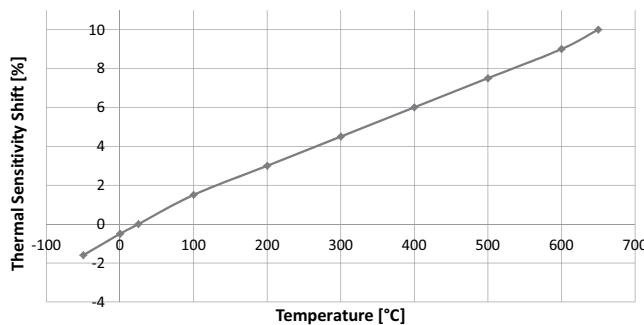


Fig. 4: Typical thermal sensitivity shift

**Electrical characteristics**

Insulation resistance		
Pin – Pin @ 25 °C	Ω	≥1·10 <sup>10</sup>
Pin – Pin @ 700 °C	Ω	≥1·10 <sup>6</sup>
Pin – Case @ 25 °C	Ω	≥1·10 <sup>10</sup>
Pin – Case @ 700 °C	Ω	≥1·10 <sup>6</sup>
Capacitance		
Pin – Pin @ 25 °C	pF	<15 + 60 pF/m
Pin – Case @ 25 °C	pF	<8 + 60 pF/m
Polarity		
Acceleration in plus Z- direction	charge	negative

**Environmental characteristics**

Operating temperature range sensor and hardline cable		
Continuous	°C	-55 ... 700
Extreme <sup>3)</sup>	°C	-55 ... 1 000
Operating temperature range termination		
LEMO PCA.0S.302	°C	-55 ... 180
7/16" -27 UNS-2A	°C	-55 ... 200
Open leads	°C	-55 ... 180
Humidity (ingress protection)		Hermetically sealed (IP68)
Max. ambient pressure @T <sub>max</sub>	bar	50
Sinusoidal vibration limit	ms <sup>-2</sup> <sub>pk</sub>	±15 000
Shock limit (1ms half sine)	ms <sup>-2</sup> <sub>pk</sub>	±25 000
Base strain sensitivity	g <sub>pk</sub> /με	<5·10 <sup>-5</sup>

<sup>3)</sup> For detailed information please contact the local Kistler sales office.

8211A\_003-340e-09.23

**Technical data (continuation)**

**Hazardous area**

Type of protection		
Ex-nA	ATEX	II 3G Ex nA IIC T6 ...T710 °C Gc SEV 17 ATEX 0140X
	IECEX	Ex nA IIC T6 ...T710 °C Gc IECEX SEV 17.0012X
Ex-ia	ATEX	II 1G Ex ia IIC T6 ...T710 °C Ga SEV 17 ATEX 0140X
	IECEX	Ex ia IIC T6 ...T710 °C Ga IECEX SEV 17.0012X
Entity parameter (intrinsic safe) <sup>3)</sup>		
Ui	V	≤30
li	mA	≤130
Ci	pF	≤15 + 170 pF/m
Li	μH	0
Pi	W	≤0.8

<sup>3)</sup> Special conditions for safe use in potentially explosive areas are described in the instruction manual

INCONEL alloy 600 are registered trademarks of INCO family of companies.

**Physical characteristics**

Weight sensor and cable	gram	30 + 47 g/m
Sensing mode		shear
Material		
Case		INCONEL alloy 600
Cable jacket		INCONEL alloy 600
Wire		Nickel
Mounting		1x M6x18 (4 N-m)

**Sensor configuration and hardline cable termination options**

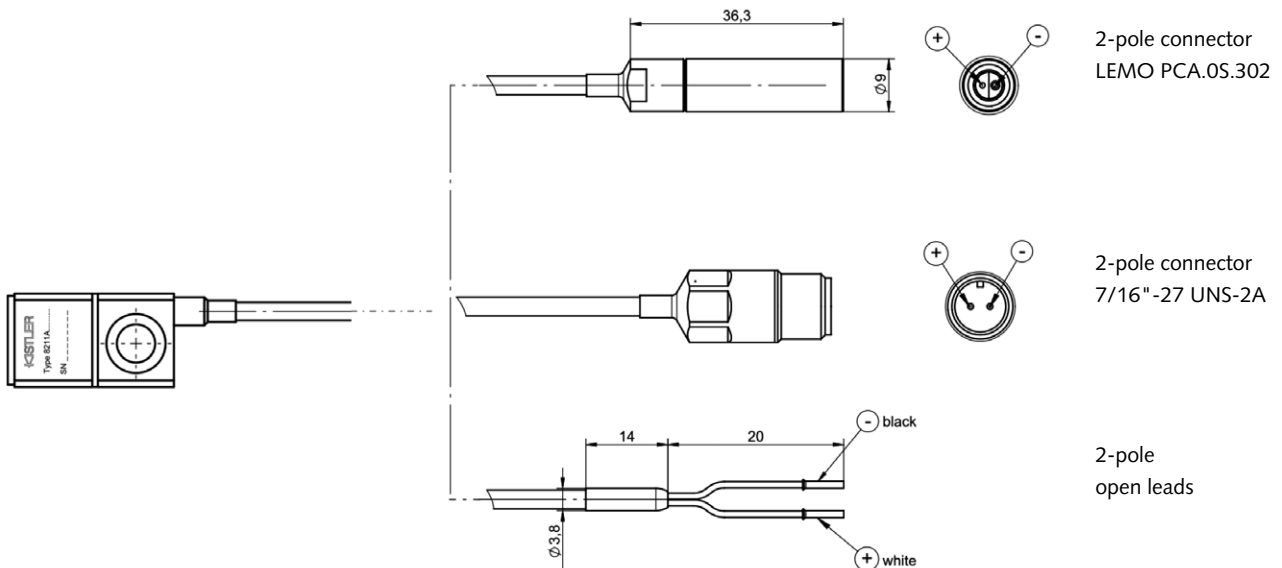


Fig. 5: Configuration options

8211A\_003-340e-09.23

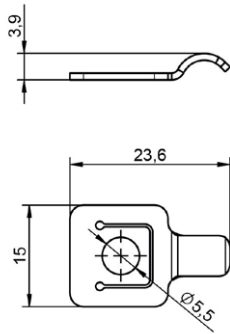


Fig. 6: Mounting bracket for hardline cable  
Type 1423A1

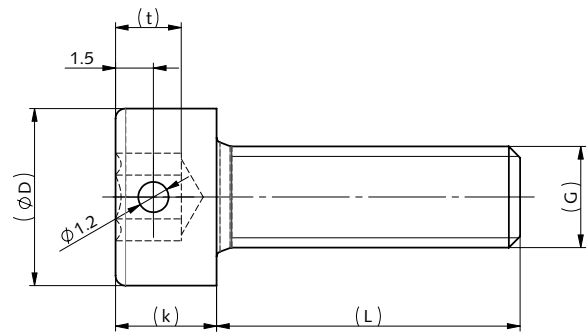


Fig. 7: Mounting screw  
Type 8445AS3 M6 for square footprint, <350°C  
Type 8445AS3HT M6 for square footprint, >350°C

**Scope of delivery**

- High temperature sensor 8211A...
- individual calibration sheet

**Optional accessories**

- |                                       |                                   |
|---------------------------------------|-----------------------------------|
| • High temperature mounting screw     | <b>Type/Mat. No.</b><br>8445AS3HT |
| • Mounting screw                      | 8445AS3                           |
| • Mounting bracket for hardline cable | 1423A1                            |
| • High temperature thread paste       | 1059                              |
| • Softline cable                      | 1652A...                          |
| • Differential charge amplifier       | 5181/83/85                        |

**Ordering key**

Type 8211 

A	1	C	J
---	---	---	---

**Ex-certification**


No Ex-certification	-
Ex-ia; Ex-nA	E

**Hardline cable termination**

Lemo 2-pol. connector	A
7/16" 2-pol. connector	B
Open leads	C

**Cable length**

3 m	03
SP (0.5 ... 10 m)	SP

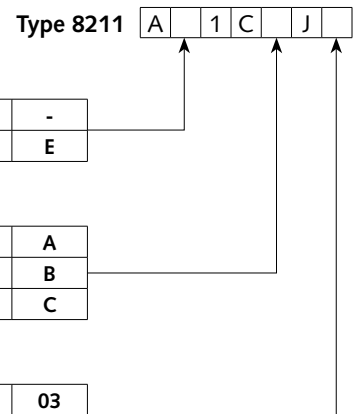

8211A\_003-340e-09.23