

High temperature pressure sensor

Type 6021A...

for gas turbine- and thermoacoustics applications

Differential, acceleration compensated, piezoelectric pressure sensor for operating temperatures up to 1 000 °C.

- Operating temperature -55 ... 700 °C
- Short time operating temperature -55 ... 1 000 °C
- · Internally case isolated
- Differential charge output
- · Highest reliability
- Not pyroelectric
- · Acceleration compensated
- <section-header> ATEX/IECEx certificated
- · CE IECEx and EAC conform

Description

Core of the sensor is the single crystal PiezoStar measuring element, which has a temperature capability up to 1 000 °C and is not pyroelectric. The sensor is designed for maximum longevity.

To reach highest resolution in harsh environment, the sensor is internally case isolated featuring two-wire technology with differential signal output. The integrated, mineral insulated hardline cable is available with different terminations.


Ex-protection (ATEX/IECEx certification) allows operation in potentially explosive environments.

Application

Main applications are protection of equipment and condition monitoring of gas turbines. In addition, the sensor is used for the development of combustion chambers of gas turbines.

General purpose and thermoacoustics applications, which require

- Temperature capability up to 1 000 °C
- Measurements of smallest pressure fluctuations
- Ex approvals for use in potentially explosive environments
- EMI resistant measuring chains

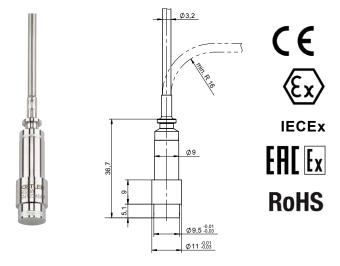

Technical data

Reference temperature for performance specifications is 25 $^{\circ}$ C unless otherwise noted.

Electric

Power		none
Output signal		charge
Signal mode		2-wire, differential
Signal conditioning		diff. charge amplifier
Insulation resistance pin – pin		
@ 25 °C	Ω	≥10 ¹¹
@ 400 °C	Ω	≥10 ⁶
@ 700 °C	Ω	≥10 ⁵
Insulation resistance pin – case		
@ 25 °C	Ω	≥10 ¹⁰
@ 400 °C	Ω	≥10 ⁶
@ 700 °C	Ω	≥10 ⁵
Capacitance pin – pin	pF	≤20 + 60 pF/m cable length
Capacitance pin – case	pF	≤8 + 175 pF/m cable length

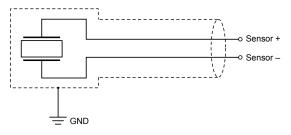


Fig. 1: Diagram, 2-wire, internally case isolated

Page 1/7



measure. analyze. innovate.

Technical data (continuation)

Operation

•		
Pressure measuring range	bar/psi	0 100 / 01 450
Calibrated partial range	bar/psi	0 20 / 0 290
Overload	bar/psi	200 / 2 900
Sensitivity (nom. ±10 %)	pC/bar	62
Thermal sensitivity shift		see Fig. 2
Linearity, hysteresis and repeatability	%FSO	≤1
Acceleration sensitivity, typical	mbar/g	0.4
Natural frequency, longitudinal	kHz	ca. 50
Frequency range		
upper range (+10 %)	Hz	ca. 20 000
lower range (–3 dB)	Hz	0.5 1)

¹⁾ In combination with differential charge amplifier Types 5181, 5183, 5185.

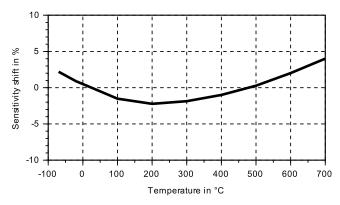


Fig. 2: Typical thermal sensitivity shift relative to room temperature

Environment

Operating temperature range		
Continuous	°C	- 55 700
Extreme 3)	°C	1 000 3)
Termination	°C	<i>–</i> 55 180
LEMO PCA.0S.302		
7/16"-27 UNS-2A	°C	-55 200
Open leads		-55 180
Shock	g	<1 000
Corrosion		see material
Humidity		
Housing with integr. cable		hermetically sealed
Connector		IP50

Explosive environment

Protection class					
Ex-nA	ATEX	-	(a) II 3G Ex nA IIC T6T710 Go Baseefa15ATEX0232X ²⁾		
	IECEx		Ex nA IIC T6T710 Gc IECEx BAS 15.0159X ²⁾		
	EAC Ex		2Ex nA IIC < <t6710°c>> Gc X TC RU C-CH.MЮ62.B.04701</t6710°c>		
Ex-ia	ATEX		(a) II 3G Ex ia IIC T6T710 Ga Baseefa15ATEX0231X ²⁾		
	IECEx		Ex ia IIC T6T710 Ga IECEx BAS 15.0158X ²⁾		
	EAC Ex		0Ex ia IIC < <t6710°c>> Ga X TC RU C-CH.MЮ62.B.04701</t6710°c>		
Entity Parameter (ir	ntrinsic safety)				
Ui		V	≤30		
li		mA	≤130		
Pi		W	≤0,8		
Ci		pF	≤15 + 170 pF/m		
Li		μH	0		

Physical

Weight sensor and cable	g	14 + 47 g/m
		cable length
Material		Nimonic alloy 90
		INCONEL alloy 718
Cable jacket		INCONEL alloy 600
Wire		Nickel

Special conditions for safe use are described in the instruction manual

Nimonic is a registered trade mark of Special Metals Wiggins Ltd.

INCONEL alloy 718 und INCONEL alloy 600 are registered trade marks of INCO family of companies.

This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

© 2016 ... 2019 Kistler Group, Eulachstrasse 22, 8408 Winterthur, Switzerland Tel. +41 52 224 11 11, info@kistler.com, www.kistler.com. Kistler Group products are protected by various intellectual property rights. For more details visit www.kistler.com

³⁾ For detailed information please contact the local Kislter sales office



Connector Types


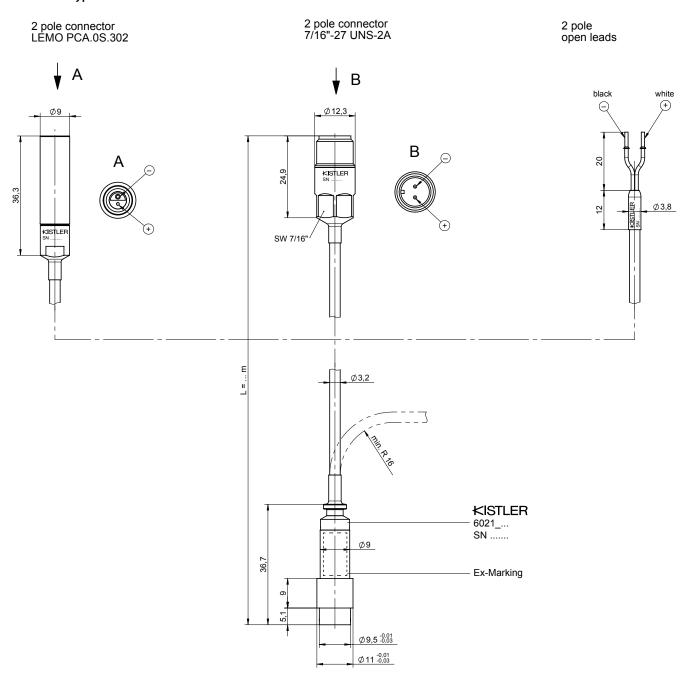


Fig. 3: Sensor dimensions Type 6021A... including cable terminations



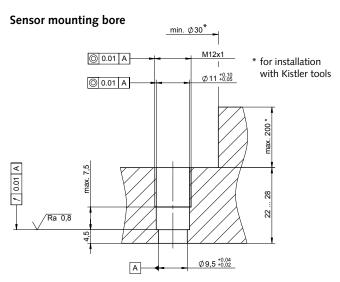

* for installation with Kistler tools

Fig. 4: Direct installation for Sensor with Lemo connector or open leads

Fig. 5: Installation with adapter Type 6419A21C or Type 6419A21E

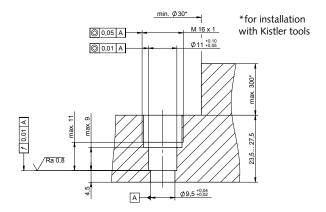


Fig. 6: Direct installation for Sensor with 7/16" connector

Sensor mounting




Fig. 7: Direct sensor installation for Sensor with Lemo connector or open leads $\,$

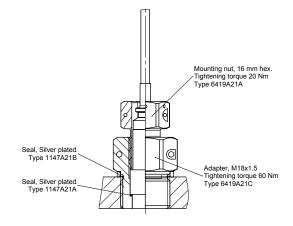


Fig. 8: Sensor installation with adapter Type 6419A21C for Sensor with Lemo connector or open leads $\,$

Page 4/7



measure. analyze. innovate.




Fig. 9: Direct sensor installation with removal tool Type 6419A21B for Sensor with Lemo connector or open leads

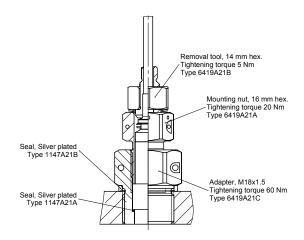


Fig. 10: Sensor installation with adapter Type 6419A21C and removal tool Type 6419A21B for Sensor with Lemo connector or open leads $\frac{1}{2}$

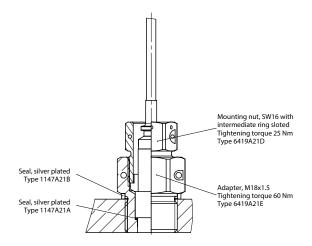


Fig. 11: Sensor installation with adapter Type 6419A21E for sensor with 7/16" connector

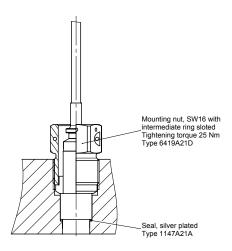


Fig. 12: Direct sensor installation for Sensor with 7/16" connector

Accessories




Fig. 13: Mounting nut M12x1, Type 6419A21A for sensor with Lemo connector and open leads $\,$




Fig. 14: Mounting nut M16x1, Type 6419A21D for Sensor with 7/16" connector

Page 5/7






Fig. 15: Removal tool, Type 6419A21B on mounting nut Type 6419A21A

Fig. 16: Adapter M18x1,5, Type 6419A21C




Fig. 17: Adapter M18x1,5, Type 6419A21E for sensor with 7/16" connector




Fig. 18: Mounting bracket for hardline cable, Type 1423A1

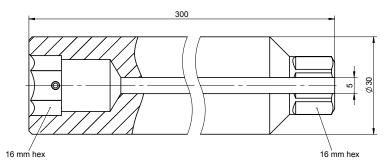


Fig. 19: Mounting tool, slotted, Type 1251A21A



Included accessories	Type/Mat. No.	Ordering key	
 Mounting nut 	6419A21A or		Type 6021A 🗀 B0 🗀 🗀
	6419A21D		† † †
 Sealing ring, silver platted (5 pieces) 	1147A21A	Ex certification	
		Not Ex certificated	_
Optional accessories	Type/Mat. No.	ATEX (ia, nA)	E
 Sealing ring, silver platted (5 pieces) 	1147A21A		
 Sealing for intermediate adapter 	1147A21B	Cable termination	
M18x1,5, silver platted		Lemo 2 pole connector	A
 Mounting nut 	6419A21A	7/16" 2 pole connector	В
 Mounting nut 	6419A21D	Open leads	С
 Insertion/removal tool 	6419A21B		
 Adapter M18x1,5 	6419A21C	Cable length	
 Adapter M18x1,5 	6419A21E	1 m	01
 Mounting bracket for hardline cable 	1423A1	2 m	02
 Mounting tool, slotted 	1251A21A	5 m	05
 High temperature thread paste 	1059	Special cable length (0,5 10 m)	sp
 Softline cable 	1652A		