

Lumbar Spine Load Cell

Type M568A6A...

Six-axial

Type M568A6A... measures forces and moments in the lumbar spine of the dummy type HIII-6 year old (Y7).

- Six-axial (F_x , F_y , F_z , M_x , M_y , M_z)
- UPS module integrable
- Low linearity errors and hysteresis
- Kistler system cabling
- Polarities according to SAE J211/1



Description

When used in the E1 dummy additional modifications at the abdominal drum and lumbar spine are necessary. The load cell is made of elements on which forces are transmitted. The mechanical deformation element, applied with strain gage, serves for mechanical electrical deformation. The forces and moments to be measured create mechanical stretches and buckling in the gaging member. In order to avoid linearity errors, the deformation paths are constructively held small (high rigidity). Thus a proportional behavior is realized.

The force and moment proportional resistance variations are measured by a Wheatstone-type bridge circuit. The load cell is available with UPS module which is integrated in an external housing in the wiring or in the connector. Customized cable lengths and connectors with specific pin assignments are optionally available.

Technical Data

Axial Data		F_x	F_y	F_z	M_x	M_y	M_z
Measuring range	kN	4,45	4,45	7,1			
	N·m				240	240	150
Bridge output voltage (typ.)	mV/V	1,7	1,7	0,9	1,2	1,2	1,8
Sensitivity (typ.)	$\mu\text{V/V/kN}$	382	382	127			
	$\mu\text{V/V/N·m}$				5,3	5,3	12,9
Bridge resistance	Ω	350	350	700	700	700	350
Ultimate load, static	%	150	150	150	150	150	150

General Data

Supply voltage ¹⁾	VDC	2,5 ... 15
Insulation resistance ²⁾	G Ω	>10
Operating temperature range	$^{\circ}\text{C}$	-20 ... 80
Storage temperature range	$^{\circ}\text{C}$	-30 ... 90
Amplitude non-linearity (typ.)	%	<1
Hysteresis (typ.)	%	<1
Channel cross talk	%	<5
Bridge zero output (typ. / max.)	mV/V	0,01 / 0,03
Weight, without cable	grams	570

All specifications are typical at 25 $^{\circ}\text{C}$ and rated at 10 V sensor supply, unless otherwise specified.

¹⁾ With UPS module 9 ... 12 VDC

²⁾ All wires to load cell housing, measured with 500 VDC

M568A6A_000-939e-05.16

Application

The load cell is directly assembled at the designated location in the dummy and provides important information about the loads on the human body occurring during a crash test.

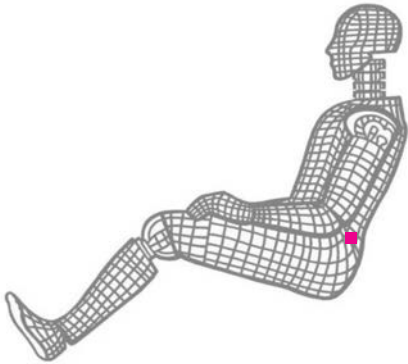


Fig. 1: Dummy application, location lumbar spine

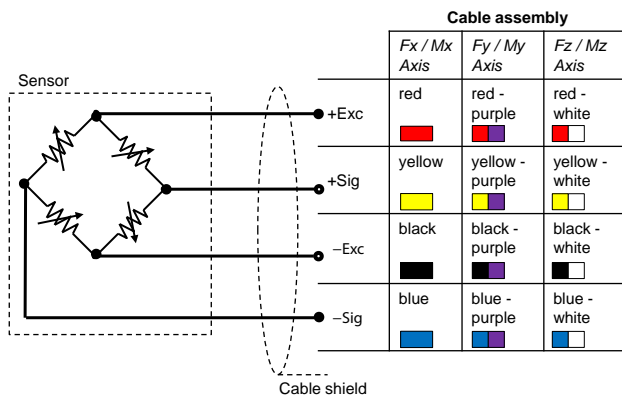


Fig. 2: Cable assembly

Included Accessories

- None

Optional Accessories

- Add. label with serial number, plug side
- UPS module
- Add. label with ID number at sensor
- Add. shunt

Art. No.

M015KABID
on request
M015KABID
on request

Ordering Key

Type M568A6A

Design

Standard	IM
----------	----

Cable Length before Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Additional Electronics

Sensor detail, as per type declaration force-moment TP-650-2	#
--	---

Cable Length after Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Connector

Conn. type, as per TP-600	#-
Conn. assignment, as per. TP-600	-#

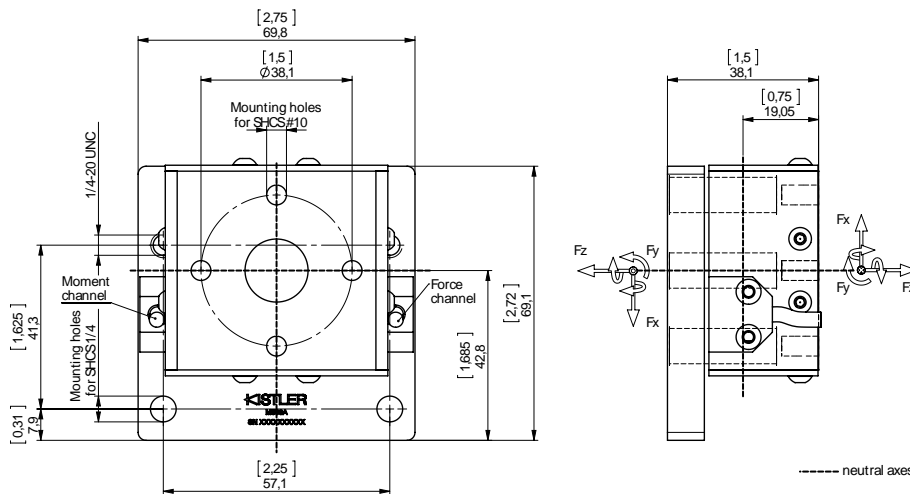


Fig. 3: Dimensions in mm

M568A6A_000-939e-05.16

This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

©2011 ... 2016, Kistler Group, Eulachstrasse 22, 8408 Winterthur, Switzerland
Tel. +41 52 224 11 11, Fax +41 52 224 14 14, info@kistler.com, www.kistler.com
Kistler is a registered trademark of Kistler Holding AG.